


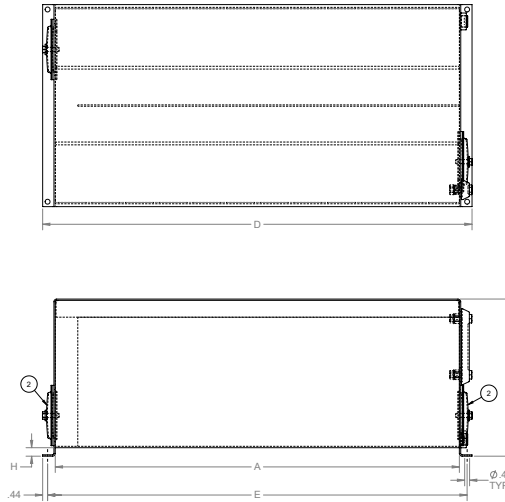


HORIZONTAL WELDED TOP

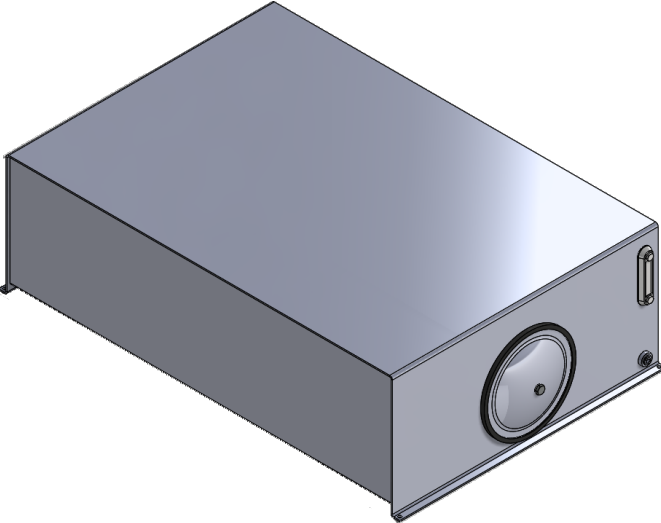

Each (PCHWT) Reservoir Includes:

1. Includes one (1) 5" oil & temp sight gauge.
2. Includes two (2) steel end covers.
3. Baffle with cutouts to enhance fluid circulation.
4. 3/4" drain with plug.
5. The exterior of the reservoir is prime painted with oil-based primer.
6. The interior is treated with rust-inhibiting oil to prevent corrosion.

Capacities and Modifications

Capacity ranges from 10 Gallons to 100 Gallons.
Can be offered without paint.

All seals are Buna-n

Standard industry guidelines for hydraulic systems recommend keeping the maximum operating temperature below 180°F (82°C). However, the materials used to construct the reservoirs are designed to function effectively within a temperature range of -40°F to 212°F (-40°C to 100°C).

Part number	Capacity (gals)	A	B	C	D	E	F	G	H	Weight (lbs)
PCHWT10	10	20.00	12.25	14.00	22.25	21.38	13.13	7.00	0.63	54.00
PCHWT20	20	24.00	14.00	18.00	26.25	25.38	17.13	9.00	0.75	82.00
PCHWT30	30	36.00	14.00	18.00	38.25	37.38	17.13	9.00	0.75	115.00
PCHWT40	40	36.00	14.00	24.00	38.25	37.38	23.13	12.00	0.75	136.00
PCHWT60	60	40.00	16.50	30.00	42.38	41.50	29.13	15.00	1.00	228.00
PCHWT80	80	48.00	16.50	30.00	50.38	49.50	29.13	15.00	1.00	262.00
PCHWT100	100	52.00	16.50	36.00	54.38	53.50	35.13	18.00	1.00	316.00
PCHWT100T	100T	48.00	18.88	30.00	50.38	49.50	29.13	15.00	0.75	281.00

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>

