
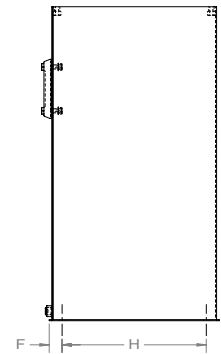
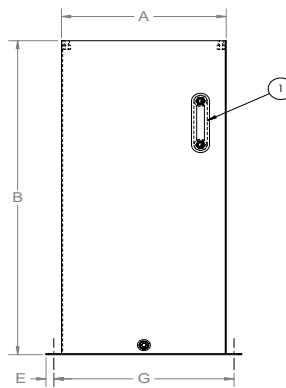



VERTICAL RESERVOIR



Each (PCV) Reservoir Includes:

1. Includes one (1) oil & temp sight gauge.
2. Hardware to count cover.
3. Buna-N Gasket bordering top edge.
4. The exterior of the reservoir is prime painted with oil-based primer.
5. The interior is treated with rust-inhibiting oil to prevent corrosion.
6. Covers sold separately.

Capacities and Modifications

Capacity ranges from 10 Gallons to 100 Gallons.
Can be offered without paint.

All seals are Buna-n

Standard industry guidelines for hydraulic systems recommend keeping the maximum operating temperature below 180°F (82°C). However, the materials used to construct the reservoirs are designed to function effectively within a temperature range of -40°F to 212°F (-40°C to 100°C).

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>



VERTICAL RESERVOIR

Part number	Capacity (gals)	A	B	C	D	E	F	G	H	Weight (lbs)
PCV-05	5	12.00	10.00	12.50	14.50	0.50	1.25	13.50	10.00	21.00
PCV-10	10	12.00	19.81	12.50	14.50	0.50	1.25	13.50	10.00	35.00
PCV-10-12	10	16.00	11.88	16.50	19.00	0.75	1.25	17.50	14.00	34.00
PCV-10-15	10	16.00	15.00	16.50	19.00	0.75	1.25	17.50	14.00	40.00
PCV-20-18	20	17.50	18.13	18.00	20.50	0.75	1.50	19.00	15.00	51.00
PCV-20-24	20	16.00	23.81	16.50	19.00	0.75	1.25	17.50	14.00	56.00
PCV-30-26	30	17.50	26.13	18.00	20.50	0.75	1.50	19.00	15.00	67.00
PCV-30-36	30	16.00	35.81	16.50	19.00	0.75	1.25	17.50	14.00	79.00
PCV-40	40	17.50	34.13	18.00	20.50	0.75	1.50	19.00	15.00	84.00

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>

