


PJIC REMOVABLE BAFFLE

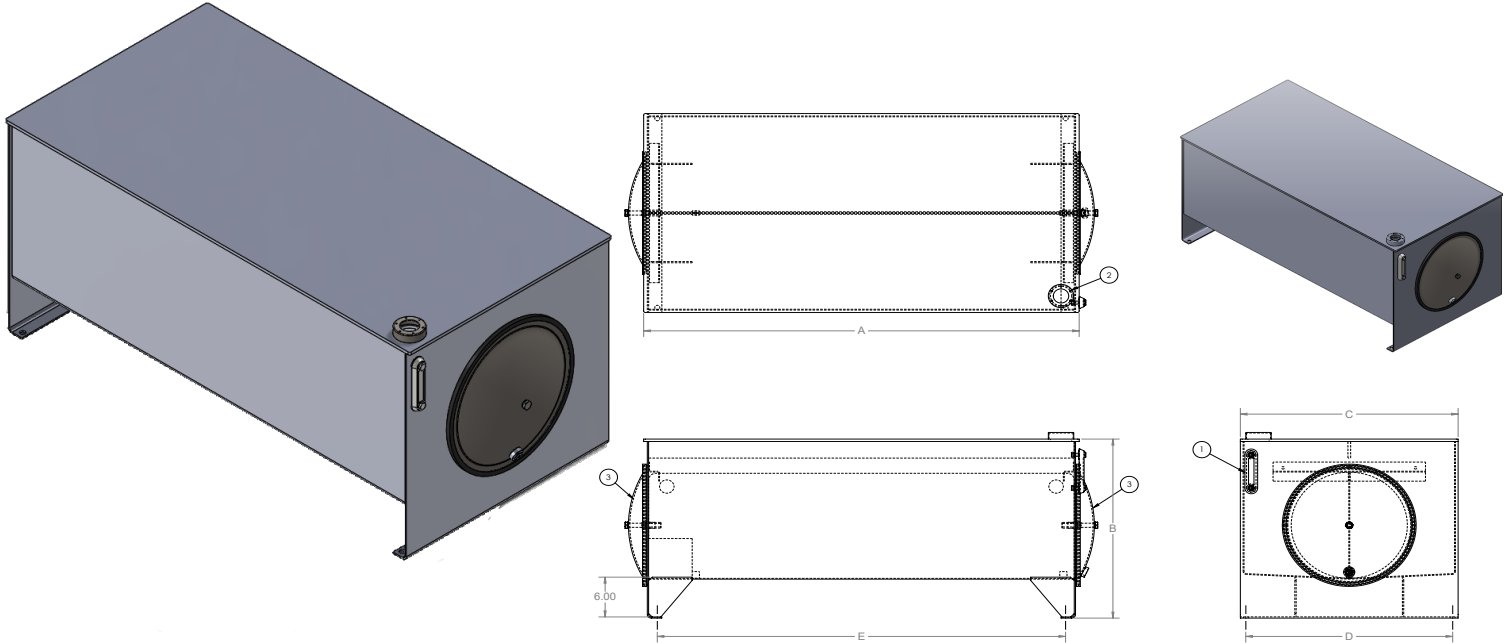

Each (PJICRB) Reservoir Includes:

1. Includes one (1) Oil & temp sight gauge
2. Equipped with one (1) riser and a filler breather featuring a bayonet-style 40-micron filter.
3. Comes with two (2) steel access covers, (1) cover includes 3/4" NPT drain with Buna-n gasket.
4. Baffle with cutouts to enhance fluid circulation
5. The exterior of the reservoir is prime painted with oil-based primer
6. The interior is treated with rust-inhibiting oil to prevent corrosion

Sight Gauge descriptions

Reservoirs from 10 Gallons to 200 Gallons receive 5" Sight gauge.
Reservoirs larger than 300 Gallons to receive 10" Sight gauge.
Sight gauge and filler breather shipped loose inside of reservoir.

All seals are Buna-n

Standard industry guidelines for hydraulic systems recommend keeping the maximum operating temperature below 180°F (82°C). However, the materials used to construct the reservoirs are designed to function effectively within a temperature range of -40°F to 212°F (-40°C to 100°C).



PJIC REMOVABLE BAFFLE

Part number	Capacity (gals)	A	B	C	D	E	Cleanout Cover	Weight (lbs)
PJICRB010	10	24.00	18.00	16.00	14.50	20.25	12.00	92.00
PJICRB015	15	26.00	19.00	18.00	16.50	22.25	12.00	119.00
PJICRB020	20	32.00	18.00	21.00	19.50	28.25	12.00	132.00
PJICRB030	30	36.00	19.38	24.00	22.50	32.25	12.00	178.00
PJICRB040	40	36.00	21.00	24.00	22.50	32.25	12.00	191.00
PJICRB050	50	36.00	23.00	24.00	22.50	32.25	12.00	201.00
PJICRB060	60	38.00	25.00	25.00	23.50	34.25	18.00	252.00
PJICRB080	80	47.00	26.88	30.00	28.50	43.25	18.00	341.00
PJICRB100	100	47.00	29.00	30.00	28.50	43.25	18.00	362.00
PJICRB120	120	60.00	31.00	30.00	28.50	56.25	18.00	481.00
PJICRB150	150	60.00	31.00	30.00	28.50	56.25	18.00	509.00
PJICRB200	200	72.00	29.00	36.00	34.50	68.25	18.00	792.00
PJICRB300	300	82.00	29.00	48.00	46.50	78.25	18.00	1221.00

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>

