
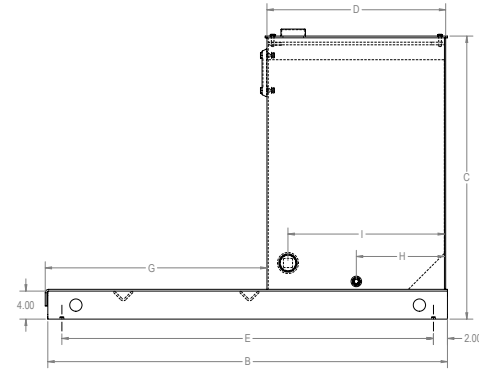

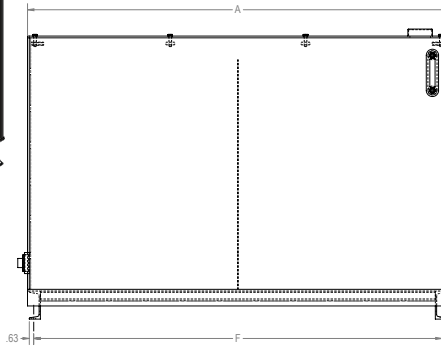


L SHAPED BOLTED TOP

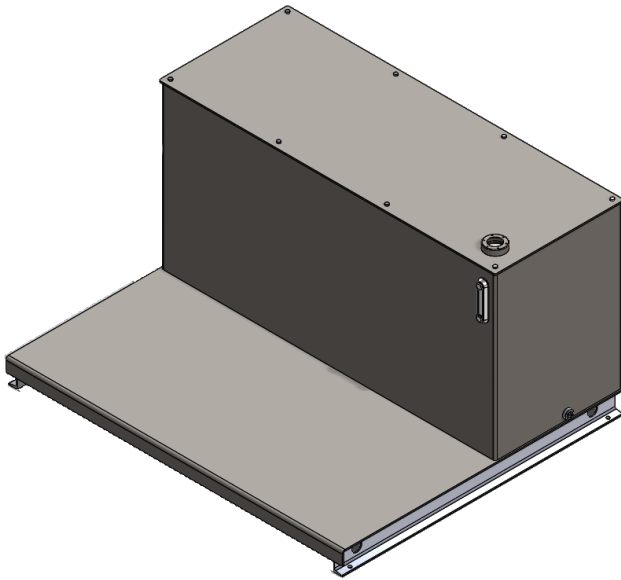

Each (PLBT) Reservoir Includes:

1. Includes one (1) Oil & temp sight gauge.
2. Equipped with one (1) riser and a filler breather featuring a bayonet-style 40-micron filter.
3. Features removable cover for top access to reservoir.
4. Includes One (1) Baffle with cutouts to enhance fluid circulation.
5. Includes One (1) Steel end cover with Buna-N Gasket.
6. Includes Return connection and drain with plug.
7. The exterior of the reservoir is prime painted with oil-based primer.
8. The interior is treated with rust-inhibiting oil to prevent corrosion.

Sight Gauge descriptions

Reservoirs from 10 Gallon to 200 Gallon to include 5" Sight Gage. Reservoirs larger than 300 Gallons to receive 10" Sight gauge. Sight Gauge and Filler Breather shipped loose inside reservoir.

Heat Capacities

Standard industry guidelines for hydraulic systems recommend keeping the maximum operating temperature below 180°F (82°C). However, the materials used to construct the reservoirs are designed to function effectively within a temperature range of -40°F to 212°F (-40°C to 100°C).

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>



L SHAPED BOLTED TOP

Part number	Capacity (gals)	A	B	C	D	E	F	G	H	I	Weight (lbs)
PLBT10	10	24.00	22.00	26.50	6.50	18.00	22.25	15.44	3.25	4.50	136.00
PLBT20	20	36.00	27.00	26.50	7.50	23.00	34.25	19.44	3.75	5.50	204.00
PLBT30	30	36.00	30.00	28.50	10.50	26.00	34.25	19.44	5.25	7.50	239.00
PLBT45	45	42.00	36.00	29.50	12.50	32.00	40.25	23.44	6.25	9.50	305.00
PLBT60	60	42.00	36.00	29.50	16.50	32.00	40.25	19.44	8.25	13.50	330.00
PLBT80	80	48.00	42.00	30.50	18.50	38.00	46.25	23.50	9.25	15.50	454.00
PLBT100	100	50.00	47.00	31.50	21.50	43.00	48.25	25.50	10.75	17.50	520.00
PLBT150	150	60.00	50.00	33.38	22.50	46.00	58.25	27.50	9.57	19.32	661.00
PLBT200	200	60.00	57.00	40.38	25.50	53.00	58.25	31.80	12.57	22.32	788.00

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>

