
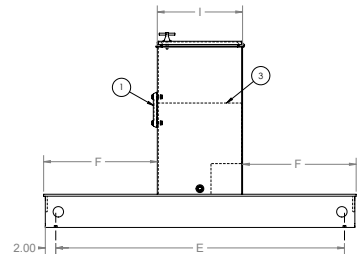
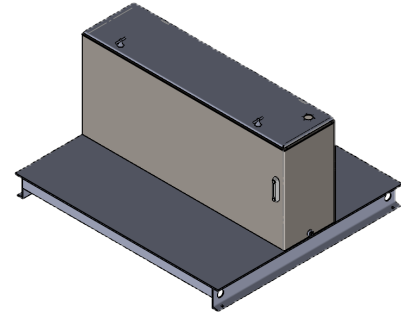
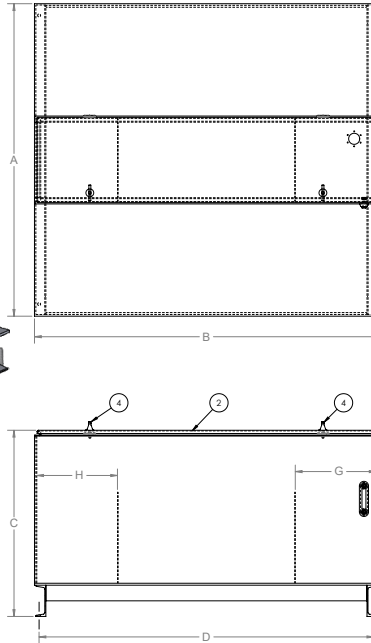


T SHAPED HINGED COVER

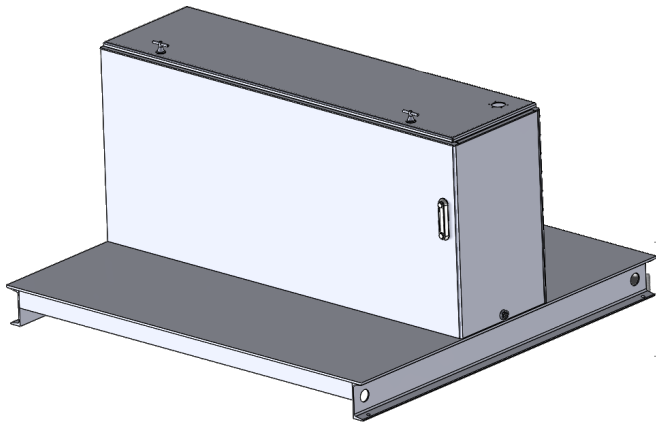

Each (PLT) Reservoir Includes:

1. Includes one (1) Oil & temp sight gauge.
2. Features cut out on cover in lieu of riser for Filler breather mounting. Filler breather featuring a bayonet-style 40-micron filter.
3. Includes two (2) Baffles with cutouts to enhance fluid circulation.
4. Capacities range from 10 Gallon to 150 Gallons to include two (2) T-handles while capacities Larger than 200 receive Three (3) T-handles.
5. The exterior of the reservoir is prime painted with oil-based primer.
6. The interior is treated with rust-inhibiting oil to prevent corrosion.

Sight Gauge & Filler breather

Reservoirs from 10 Gallon to 200 Gallon to include 5" Sight Gauge . Reservoirs from 300 gallon Larger to include 10" Sight Gauge. Sight Gauge and Filler Breather shipped loose inside reservoir.

All seals are Buna-n

Standard industry guidelines for hydraulic systems recommend keeping the maximum operating temperature below 180°F (82°C). However, the materials used to construct the reservoirs are designed to function effectively within a temperature range of -40°F to 212°F (-40°C to 100°C).

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>



T SHAPED HINGED COVER

Part number	Capacity (gals)	A	B	C	D	E	F	G	H	I	Weight (lbs)
PLT-060	60	58.00	48.00	35.88	46.25	53.50	20.63	16.00		16.75	511.00
PLT-080	80	60.00	66.00	35.74	64.25	55.44	21.81	15.50	15.50	16.38	847.00
PLT-100	100	65.13	66.00	38.74	58.25	60.63	22.88	16.00		19.38	892.00
PLT-120	120	68.13	72.00	38.94	70.25	63.38	25.38	16.00		19.38	1096.15
PLT-150	150	76.13	72.00	38.94	70.25	71.38	25.38	16.00		25.38	1208.00
PLT-200	200	78.13	84.13	41.94	82.38	73.38	26.38	16.00	16.00	25.38	1454.00
PLT-300	300	77.75	84.00	53.87	82.25	73.25	26.19	16.00	16.00	25.00	1772.00

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>

