






VERTICAL SERIES 2

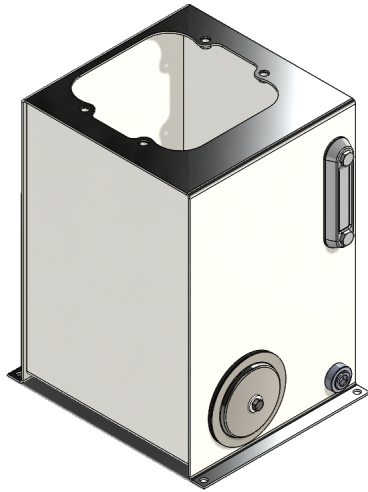

Each Vertical Series (PVSR) Reservoir Includes:

1. Includes one (1) oil & temp sight gauge.
2. Hardware to mount cover and Buna-N gasket.
3. The exterior of the reservoir is prime painted with oil-based primer.
4. The interior is treated with rust-inhibiting oil to prevent corrosion.
5. Covers sold separately.

Capacities and Modifications

Capacity ranges from 2 Gallons to 25 Gallons.
PVSR reservoirs fit Series one covers.
Can be offered without paint.

Heat Capacities

Standard industry guidelines for hydraulic systems recommend keeping the maximum operating temperature below 180°F (82°C). However, the materials used to construct the reservoirs are designed to function effectively within a temperature range of -40°F to 212°F (-40°C to 100°C).

Part number	Capacity (gals)	A	B	C	D	E	F	G	H	J	Weight (lbs)
PVSR08	8	12.00	18.00	12.00	14.25	11.13	13.38	5.00	1.63		38.00
PVSR10	10	16.75	14.00	15.00	19.00	14.00	18.13	6.38	3.00		46.00
PVSR14	14	18.00	20.00	12.00	20.25	11.13	19.38	5.00	1.63		54.00

Address: 10617 Wolf Dr Huntley IL 60142

Phone number: +1(847)659-9770

Email: sales@polluxw.com

<https://polluxw.com>

